



SwitchGenie LLC
4576 Echo Lane, Stacy MN 55079
651-462-4361, 651-462-3992 fax
1-800-522-1196 toll free
info@switchgenie.com
www.switchgenie.com

Bi-Level-R


To comply with the requirements of EAct 2005, here is a new product that allows you to have two levels of light in a space without rewiring.

ENERGY SAVING

By inserting a “Bi-Level-R” in the power feed wiring to half the fixtures in the room, you will have two levels of lighting. (See attached drawing)

When you turn the switch or circuit breaker on, the fixtures without the “Bi-Level-R” will come on. To get full light, just toggle the switch off and back on within 2 seconds and all the lights will come on.

The Bi-Level-R has 3 wires. a black wire, white wire, and blue wire.

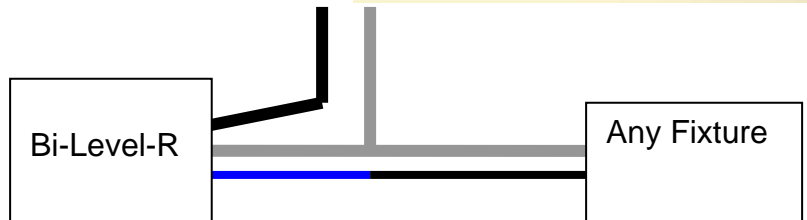

The cost of the Bi-Level-R, with installation, will be repaid by energy savings in two years or less, assuming that it is kept off for 18 hours a day, five and half days a week with energy costing \$.12 KWH.

The black wire from the Bi-Level-R to connects to the power feed black wire. The blue wire from the Bi-Level-R connects to the black wire to the fixture. The white wire connects to the white wire feeding the fixture. Connect all three white wires together.

COMPLIANCE ONLY

If you are not concerned about energy saving but want to qualify for the tax deduction you can use the Bi-Level-R-C. The wiring is the same as the Energy Saving model.

With this model when you turn on the light switch all the lights come on full bright.

Then if you have to demonstrate that you have bi-level lighting controls, just toggle the switch off and back on within 2 seconds and half the lights will turn off. The lights that have the Bi-Level-R installed on the fixtures will turn off.

UL Listed, Patented, Made in USA.